

# Takai

When power goes hand in hand with comfort



## Motion sensor

Technology that saves you money – with a motion sensor to continuously analyze the presence of people in the room. If there is no detection after 20 min, the setpoint is shifted by one degree; after 40 min it shifts one degree again. (Fig. 1)

## 4-Way Swing

Because the blades move both vertically and horizontally, the air is distributed more uniformly, improving the level of comfort in the room. (Fig. 2)

## Low noise level

Our Takai indoor units were designed to work at low noise levels from 20dB(A), to keep them completely discreet.

## Constant Power technology

The CONSTANT POWER solution has been specially developed by HITACHI. It improves the performance of your heat pump and maintains its heating power up to an outside temperature of -15°C and ensures heating up to -20°C. (Fig. 3)

## Double fan blade

For a pleasant and improved air flow in the living room, the Takai unit is equipped with a double fan blade. This double blade discreetly ensures a comfortable flow of air, avoiding the unpleasantness of a 'swinging fan'.

## FrostWash technology

The Takai is designed to offer you effective air purification throughout the year with its exclusive and innovative functionality: FrostWash. Automatically and regularly cleans the heat exchanger to emit pure, clean air.

## Ultra performance filtration

STAINLESS prefilters and Active Carbon filters as standard. The Active Carbon filter with silver ions (known for their antibacterial properties) acts by adsorption. This retains certain gas molecules or suspended particles on the surface of the filter. The air that comes out of the filter is then free of odors and pollutants.

Fig. 1

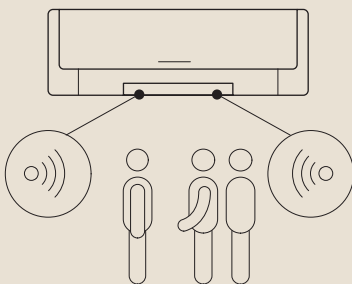


Fig. 2






Fig. 3

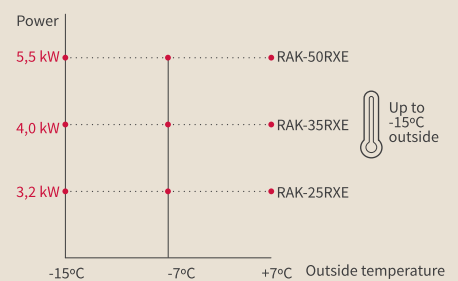


### Indoor units




RAK-25RXE  
RAK-35RXE  
RAK-50RXE

### Outdoor units



RAK-25WXE  
RAK-35WXE



RAK-50WXE



Discover Takai



Performance, cooling	Unit	2.5 kW	3.5 kW	5.0 kW
Rated power, cooling (min-max)	kW	2.50 (0.90 - 3.10)	3.50 (0.90 - 4.00)	5.00 (1.90 - 5.20)
Rated power input Cooling (min-max)	kW	0.481 (0.25 - 1.00)	0.814 (0.25 - 1.40)	1.397 (0.50 - 2.10)
EER	-	5.20	4.30	3.58
Energy class Cooling	-	A+++		A++
SEER (average climate)	-	8.50	8.70	7.50
Guaranteed performance Cooling	°C	-10°C / + 43°C		

Performance, heating	Unit	2.5 kW	3.5 kW	5.0 kW
Rated power, heating (min-max)	kW	3.20 (0.90 - 4.20)	4.00 (0.90 - 4.80)	5.80 (2.2 - 7.00)
Power at full charge at -7°C <sup>(1)</sup>	kW	3.20	4.00	5.50
Rated power input Heating (min-max)	kW	0.593 (0.25 - 1.20)	0.800 (0.25 - 1.60)	1.415 (0.50 - 2.70)
COP	-	5.40	5.00	4.10
Energy class Heating	-	A+++		A++
SCOP (average climate)	-	5.20		4.70
Guaranteed performance Heating	°C	-20°C / + 21°C		

Indoor units	Unit	RAK-25RXE	RAK-35RXE	RAK-50RXE
Sound pressure in Cooling mode (spv / pv / mv / gv) <sup>(2)</sup>	dB(A)	20 / 27 / 35 / 43	22 / 29 / 37 / 45	25 / 31 / 39 / 47
Sound pressure in Heating mode (spv / pv / mv / gv) <sup>(2)</sup>	dB(A)	20 / 28 / 36 / 43	22 / 30 / 37 / 45	25 / 31 / 39 / 48
Sound pressure in Cooling mode	dB(A)	58	60	
Airflow in Cooling mode (spv / pv / mv / gv)	m³/h	300 / 330 / 510 / 600	320 / 340 / 520 / 660	350 / 400 / 580 / 720
Dehumidification	l/h	1.4	1.6	2
Dimensions (H x L x D)	mm	295 x 900 x 210		
Net weight	kg	11		
Remote control	-	Weekly infrared (included)		

Outdoor units	Unit	RAC-25WXE	RAC-35WXE	RAC-50WXE
Sound pressure in Cooling mode <sup>(2)</sup>	dB(A)	47	48	51
Sound pressure in Cooling mode	dB(A)	61	62	65
Airflow (Cooling / Heating)	m³/h	1860 / 1620	1920 / 1620	2160 / 2160
Dimensions (H x L x D)	mm	600 x 792 x 299		736 x 800 x 350
Net weight	kg	37.5		51
Compressor	-	Rotary		2-cylinder rotary


Cooling properties	Unit	RAC-25WXE	RAC-35WXE	RAC-50WXE
Diameter of pipes (Liq / Gas)	inches	1/4" / 3/8"		1/4" / 1/2"
Initial coolant fill	kg	0.98		1.3
Prefilled for	m	20		30
Min. length	m	3		
Max. length / Coolant refill	m/g/m	20 / -		30 / -
Max. level difference (outdoor unit above / outdoor unit below)	m	10 / 10		
Coolant	-	R32		

Electrical features	Unit	RAC-25WXE	RAC-35WXE	RAC-50WXE
Power supply	V/Ph/Hz	230V / 1Ph / 50Hz		
Operating current (Cooling / Heating)	A	1.09 - 4.35 / 1.09 - 5.22	1.09 - 6.09 / 1.09 - 6.96	2.17 - 9.13 / 2.17 - 11.74
Cable width (EN 60 335-1)	mm²	1.50 x 2 + T		2.50 x 2 + T
Indoor/outdoor connection (protected)	mm²	1.50 x 3 + T		2.50 x 3 + T

<sup>(1)</sup> Data includes defrosting. To find out the data for your project, refer to our technical catalogs.  
<sup>(2)</sup> Sound pressure measurements were made 1 meter from the unit without obstructions (see the technical catalog).

Retail price per unit excluding taxes	(+eco part.)	RAK-25RXE	RAK-35RXE	RAK-50RXE
Indoor unit (Infrared remote control included)	€+1.67	€739	€842	€1,253
External unit	€+6.67	€1,177	€1,370	€2,055
Price for whole set Indoor unit + outdoor unit	€+8.34	€1,916	€2,212	€3,308

Eco-participation is a net unit amount excluding taxes and is not discountable. It is added to the net price.

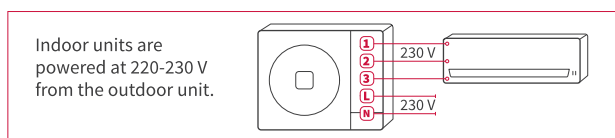

## Controls and compatible accessories (see page 197)

Infrared remote control  
RAR-6NE1  
Included

Wired standard remote control  
SPX-RCDB1  
Price plus taxes: €150

Other (price excluding taxes):

- Control box for multi-indoor units  
SPX-DST1 (€63) + SPX-WDST8M (€70)
- interface airCloud Home SPX-WFG02 : €143
- Hi-Box AHP-SMB-01: €215
- Hi Kumo interface for Hi-Box SPX-TAG01 : €150
- Single dry contact kit SPX-WDC3: €26
- Single error report kit SPX-WDC7 (€26) + HA-S100TSA (€77)

Wired programmable remote control  
SPX-WKT4  
Price plus taxes: €195

H-Link box  
PSC-6RAD  
Price plus taxes: €199