

Cassette

SPLIT SYSTEMS

R407C



- Automatic restart
- Air sweep
- Fresh air intake
- Discharge into adjacent room



MKC-MKH 34 to 54



MOC-MOH 35




MOC-MOH 45 - 55



Remote Controller

- Wireless or wired version available
- 5 operations modes (Cool/Heat/Auto/Dry/Fan)
- Sleep mode
- Room temperature setting
- Fan speed selection
- Timer
- Filter dirty indicator timer
- LCD display
- Indoor PCB LED Diagnostic Function

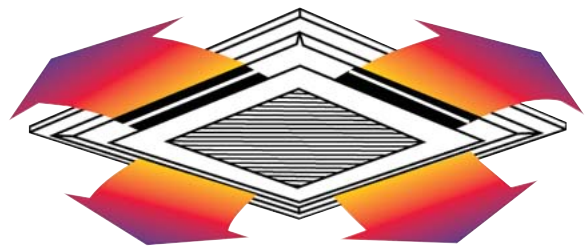



R407C

Cassette

MKC-MKH 34 to 54



Remote start/stop

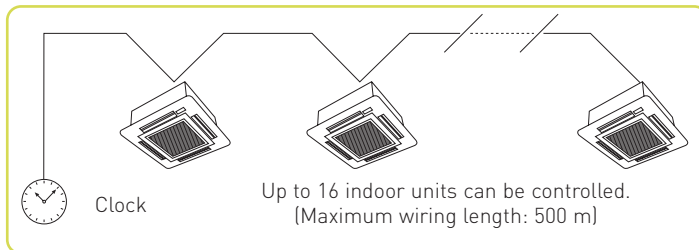

Technical features

		MKC - MKH		
Models	Sizes	34P	44P	54P
Cooling capacity	kW	8,1	12,0	13,8
Heating capacity	kW	8,3	12,2	13,9
Compressor	Type	Scroll		
Refrigerant		R407C		
Power supply	V/Ph/Hz	400 / 3 / 50 + E + N		
Power input	kW	3,6	4,9	5,3
Fuse rating	A	10	16	16
Indoor airflow (high speed)	m ³ /h	1 360	1 630	1 740
Noise level at 2.5 m	Indoor	dB(A)	42 / 44 / 47	44 / 47 / 51
	Outdoor	dB(A)	58	59
Dimensions	Ind./Outd.	H (mm)	350 / 900	350 / 1142
		W (mm)	836,5 / 1 060	836,5 / 1 060
		D (mm)	827,5 / 345	827,5 / 345
	Pannel	W (mm) x D (mm)	950 x 950	
Net weight	Indoor unit	kg	60	60
	Outdoor unit	kg	108	127
Piping	Type of connection		Flare	
	Diameter	Gas	5/8"	3/4"
		Liquid	3/8"	3/8"
Refrigerant charge (c/o - h/p)	g	3000 - 2500	3000 - 3000	4000 - 4000
Max pipe run	m	25	30	30
Operating limits - cooling mode	mini / maxi	+19°C (0°C with low temperature kit (accessory) / +46°C		
Operating limits - heating mode	mini / maxi	-10°C / +24°C		

Nominal cooling capacity based on : - Indoor Air Temp. 27°C DB / 19°C WB - Outdoor Air Temp. 35°C DB

Nominal heating capacity based on : - Indoor Air Temp. 21°C DB - Outdoor Air Temp. 7°C DB/6°C WB

Piping length : 7.5 m with initial charge

Accessories

Sizes	34P	44P	54P
Wired control (8 m cable) cooling		AMR01P	
Wired control (8 m cable) heat pump		AMR02P	
PCB link		625T300012-000	
Wall mounting kit		AMW50A	
Floor mounting kit		AMF44B	
Low ambient kit for MOC		625T20003-000	
Low ambient kit for MOH		625T20003-000 + 024T05052-000	