

Primary ductable

Medium pressure

7 to 17 kW (R32), single-split and unit control




+ VERSATILITY

- **H-Link** (optional)
- **Compatible with modbus, KNX, BACnet** (optional)
- **Unit control** (optional, up to 8 indoor units)

+ EASE OF INSTALLATION


- **Pickup from the rear or underneath**
- **Standard ON/OFF dry contact**
- **Static pressure:** Up to 120 Pa
- **Integrated condensate pump** : 700 mm lift height

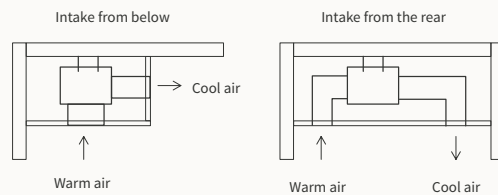


+ FOR ENERGY COST SAVINGS

- **Weekly programming:** Optimize the unit's operation without compromising comfort.
- **Function setback:** Ideal for creating night-time reductions in summer or winter.

Indoor units

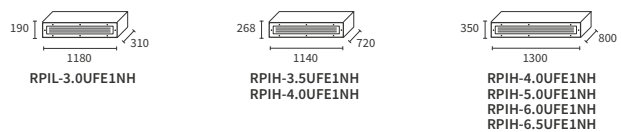

Outdoor units

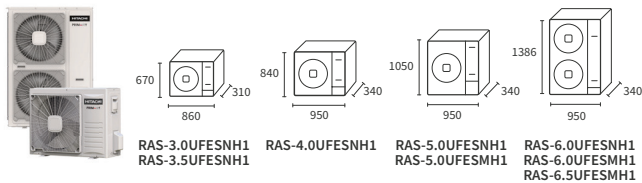

Compatible controls and accessories

Individual checks



Programmable wired remote control
Ref.: HCWA21NEHH
Included



Infrared remote control
Ref.: HRBB31NEGH

GTB & Group Controls



KNX (1-1) gateway
Ref.: AZAI6KNXHT3



Modbus/BACnet (1-1) gateway,
Multi-function gateway (1 of your choice): Unit control / Modbus / BACnet
Ref.: GH-64MFGN



The PRIMARY range is also compatible with the centralized GTB gateways of the VRF range via the H-LINK HCAA03NEWI interface.

H-Link solution



H-Link gateway
Ref.: HCAA03NEWI



Remote control panel
Ref.: PSC-A32MN



or CSNET MANAGER



airCloud Pro
Ref.: HC-IOTGW

Find details of Primary management solutions on P 175.

