


Primary ceiling unit console

7 to 17kW (R32), Single-split and group control



+ FLEXIBILITY

Ideal for gyms

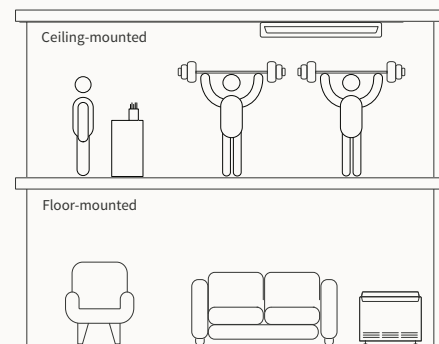


+ SIMPLICITY

- **Standard ON/OFF dry contact**
- **H-Link** (optional)
- **Group control** up to 8 IU


+ FOR ENERGY COST SAVINGS

- **Weekly programming:** Optimize the unit's operation without compromising comfort (with the HCWA21NEHH remote control).
- **Function setback:** Ideal for creating night-time reductions in summer or winter.

Indoor units



Outdoor units

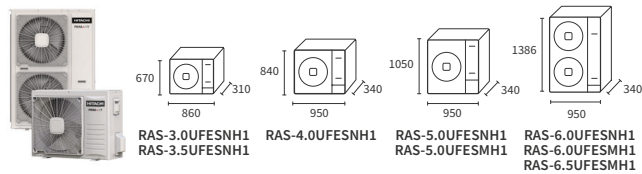

Compatible controls and accessories

Individual checks



Programmable wired remote control
Ref.: HCWA21NEHH



Infrared remote control
Ref.: HRBB31NEGH
Included

Condensats



Indoor unit condensate drain pump
Ref.: P26(E)-2 (3; 3.5 HP)
Ref.: P26(E)-3 (4; 5; 6; 6.5 HP)

GTB & Group Controls



KNX (1-1) gateway
Ref.: AZA16KNXHT3



Modbus/BACnet (1-1) gateway,
The group control adapter is used as a Modbus or BACnet gateway (only one function can be selected).
Ref.: GH-64MFGN



The PRIMARY range is also compatible with the centralized GTB gateways of the VRF range via the H-LINK HCAA03NEWI interface.

H-Link solution



H-Link gateway
Ref.: HCAA03NEWI



Remote control panel
Ref.: PSC-A32MN



or CSNET MANAGER



airCloud Pro
Ref.: HC-IOTGW

Find details of Primary management solutions on P 175.

